



Testing headers with Fiddler

Setting up QEMC to support Header


1. In the QEMC you to make sure the QVS is setup to Prohibit anonymous and set for DMS authorization.

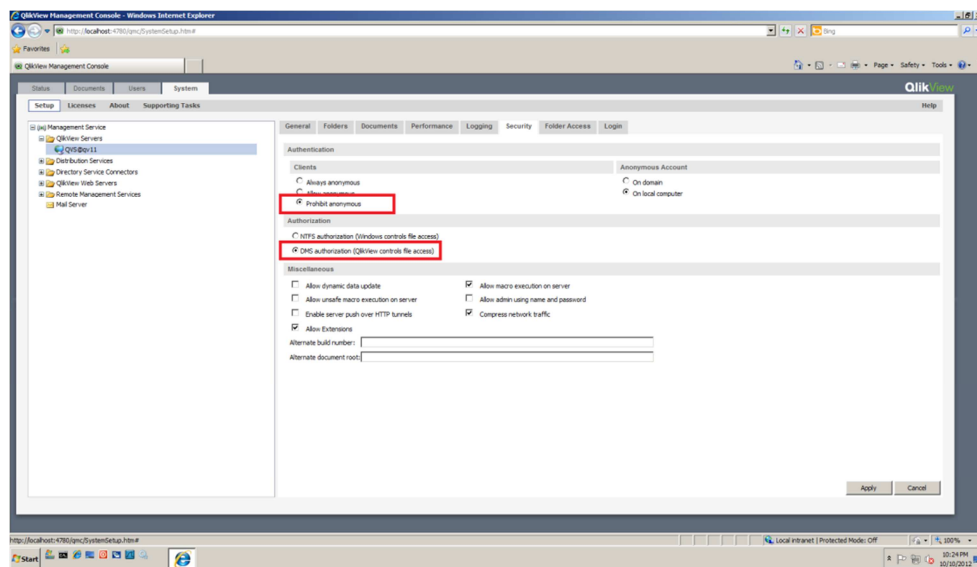

2. Under the Web Server > Authentication Tab set type to Header and in the Parameters the Header Name and Prefix if you use one.

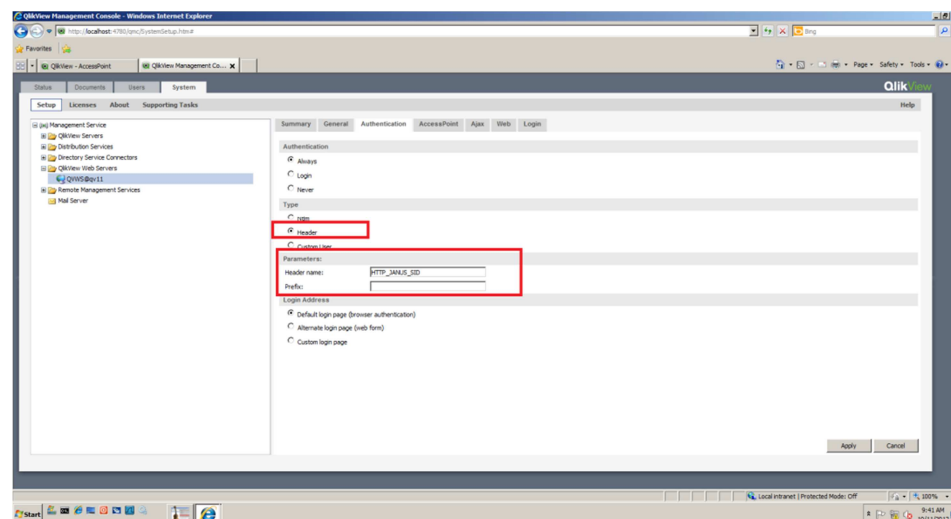


- Under User Document you have to set the Authorization on the QVW you want the users to have rights to (This can be set by publisher). In the below I have set this to U249836.

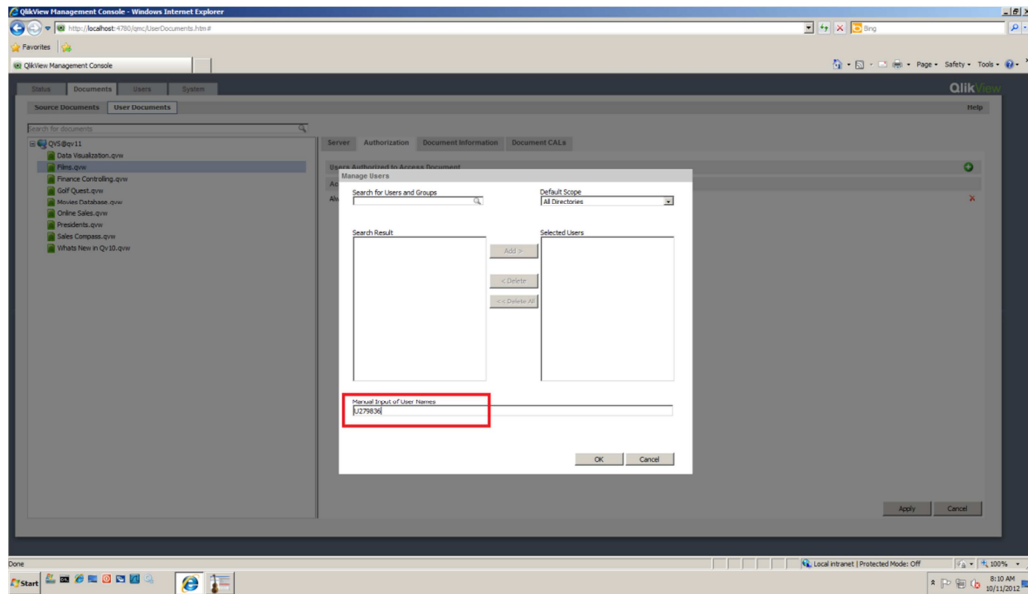


Setting up Fiddler to Test


- In Fiddler you need to select the Filters Tab and Check "Use Filters". Then under Request Headers you need to check "Set request header" and put in the header name and UserID.

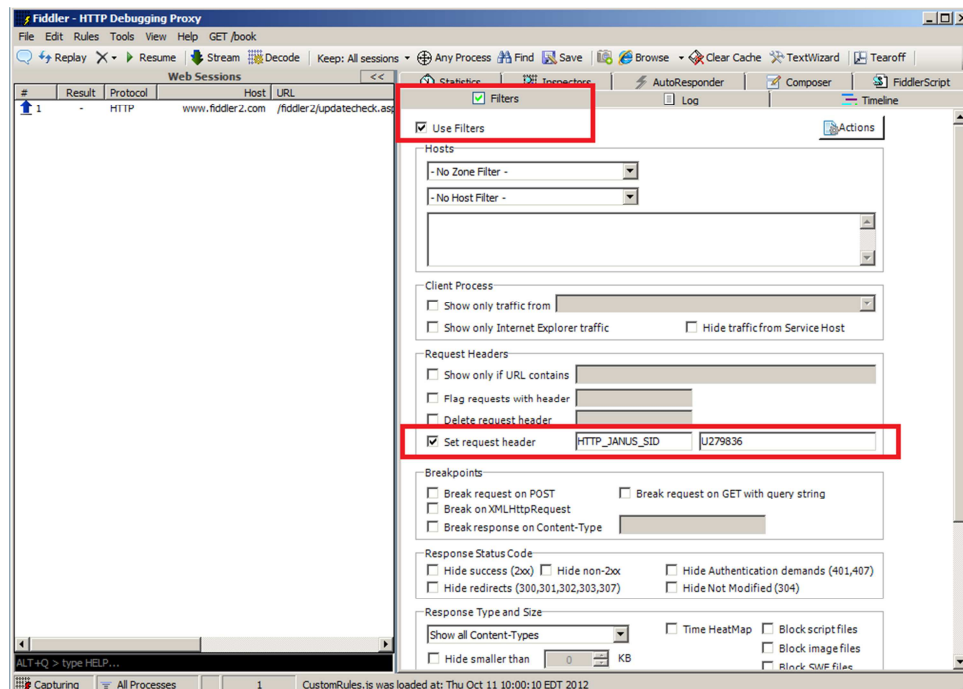


- Next at top for Fiddler “Clear Cache” and then click “Browse”

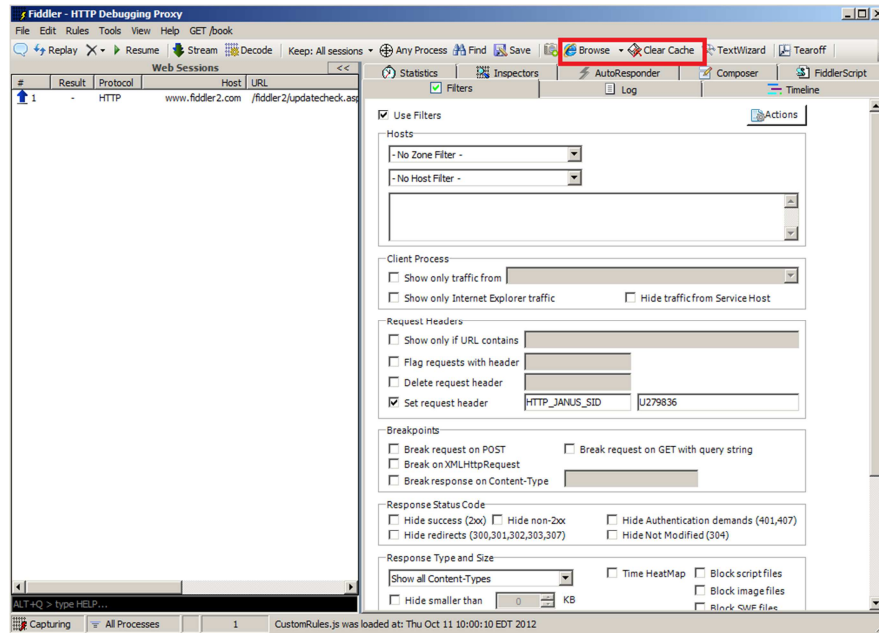

- This should open IE and you will need to put in <http://<SERVERNAME>/qlikview> this will open the AccessPoint and it should show the documents users U279836 has rights to.

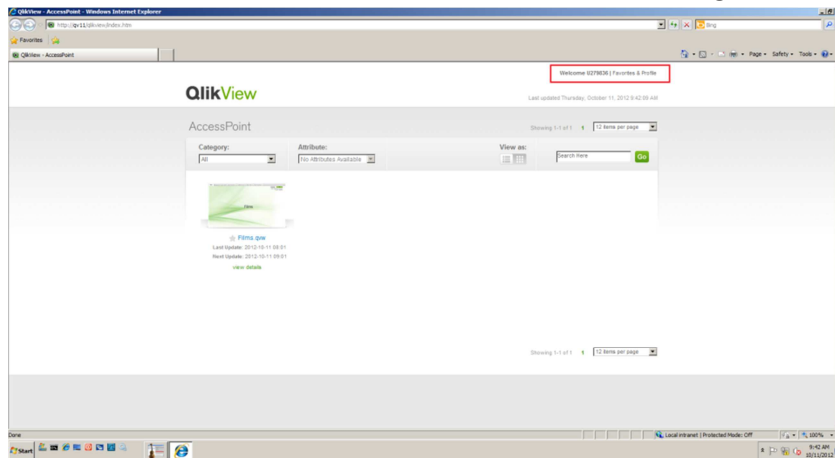

To test this farther I change the UserID in Fiddler to U279835

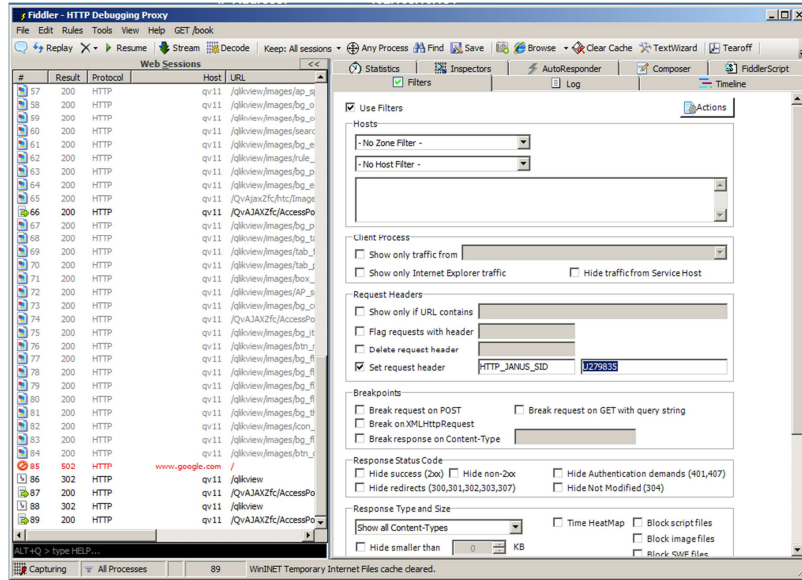

I see this user has no documents.

