After settings up QVS to use DMS and Custom Users for authentication, the Virtual Folders in IIS need to be reconfigured from the default as follows:

Sites	Anonymous Authentication	Enabled
🔞 Default Web Site	ASP.NET Impersonation	Disabled
🕀 🧰 aspnet_dient	Basic Authentication	Disabled
🕀 🖓 QlikView	Forms Authentication	Disabled
🛱 🖓 QvAJAXZfc	Windows Authentication	Disabled

The QvAJAXYfc folder needs to be set to ENABLE Anonymous Authentication Windows Authentication needs to be DISABLED.

tion Pools	Name 🔺	Status
	Anonymous Authentication	Disabled
ault Web Site	ASP.NET Impersonation	Disabled
aspnet_client	Basic Authentication	Disabled
QlikView	Forms Authentication	Disabled
QvAJAXZfc bin htc	Windows Authentication	Enabled
AccessPointSettings.aspx		

and the

It is, however, necessary to make sure that the AccessPointSettings.aspx is setwithAnonymous DISABLED and Windows Authentication ENABLED, otherwise theWebServerSettings can no longer be reached through the QEMC.

Note: In version 11 there is not AccessPointSettings.aspx. So all you need to do is the first step.

Next we need to setup Qlikview for customer users. Start with the setting for QlikView server. Need to change the Authorization on the Security tab to "DMS".

() Management Service	General Folders Documents Performs	nce Logging Security Cluster Folder Access Login						
QV50qv10	Authentication	Authentication						
Distribution Services	Clients	Anonymous Account						
	C Always anonymous C Allow anonymous C Prohibit anonymous	C Allow anonymous C On local computer						
	Authorization							
	C NTFS authorization (Windows controls file access)	C NTFS authorization (Windows controls file access)						
	DMS authorization (QlikView controls file access)	CDMS authorization (QikView controls file access)						
	Miscellaneous	Miscellaneous						
	Allow dynamic data update	Allow macro execution on server						
	Allow unsafe macro execution on server	Allow admin using name and password						
	Enable server push over HTTP tunnels	Enable server push over HTTP tunnels Compress network traffic						
	Allow Extensions	Allow Extensions						
	Alternate build number:	Alternate build number:						
	Alternate document root:	Alternate document root:						
			Apply Cancel					

Now let's setup the Directory service for Customer users. First we have to create the Custom group. You will need to click on the Green "+" to the right and then the edit button in the middle. The default that will be set will be Custom. Once you click "apply" it will save it and a new Tab will appears label "Users".

On the user tab is where you will setup all our custom users. Fill in the information and select apply.

Users System					QlikVi
		liser information		Groups	
88 •• 12		Full name: E-mail:	Bill Britt support@qlkview.com	or output	
					Add Clear
				Groups	
	Bill Britt		support@qlikview.com		2 X
					Apply Cancel
	88	₿8 ••	User information Ø Full name Ø Full name	User information ID F4 none: P4 fort: Image: Enal; Pupport@diven.com Image: Fail name Enal;	User information Groups Ø Fulname: Pal Brit: Image: Palport@disee.com Fulname Ø E-mail: Paport@disee.com


We now need to setup the webserver to accept custom users. On the Authentication Tab change the type to "Custom User" and the "Login Address" to "Alternate Login Page".

Setup Licenses About Supporting Tasks		
(wi) Management Service	Summary General Authentication AccessPoint Ajax Web Login	
QYSBerJ0 Wirking Service Wirking Service Wirking Service QYSBerJ0 QYSBERJ0 QYSBERJ0 QYSBERJ0	Authentication @ Always C Logn C Never Type C Ndn C Neder	
	Coston Use Parameters: Prefix: CUSTOM Login Address	
	C Defaul logn page (tronser authentication) (C) Jatematic logn page (trob form) C Custom logn page	
		Apply Cancel

The last step is to setup the documents to for DMS authentication. On the" Documents" Tab and then "Users Documents" you will need to select a document and then go to the "Authorization" select the add button and type in the user name. (This can be done with Publisher doing a reload and distribution)

ource Documents User Documents								
QV5@qv10	Server Settings	Authorization	Document Information	Server Objects	Document CALs			
Data Visualization.gvw								-
Films.gvw	Recipients							0
Online Sales.gvw	Name					Access		
Presidents.gvw	bb					Always	1	×
							Apply	

You are now ready to test the setup. Open IE and got to <u>Http://<servername>/qlikview</u> you should see a login form.

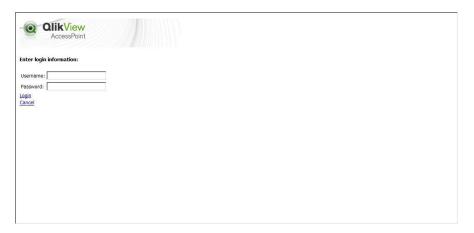

Put your user ID/Password and click "Login" and you should see the AccessPoint page. As you see on the top right I am login as BB.

